



24 Watt Series

Desktop Type

ATS024T - ☐ X X X

P : C6 / C14

A : C8

O / P Voltage



Features :


- IEC/EN/UL 62368-1 3rd Edition
- 100-240VAC Universal Input
- Regulated Output With Low Ripple Noise
- Safety Agency Requirements and EMI/EMS Certified
- Modified and Custom Design Available
- 1 Year Warranty

Model	O/P Voltage	O/P Current	Watt
ATS024T- ☐ 050	5.0V	4.0A	20.00W
ATS024T- ☐ 060	5.9V	3.5A	20.65W
ATS024T- ☐ 061	5.9V	4.0A	23.60W
ATS024T- ☐ 070	7.0V	3.0A	21.00W
ATS024T- ☐ 075	7.5V	3.0A	22.50W
ATS024T- ☐ 090	9.0V	2.5A	22.50W
ATS024T- ☐ 120	12.0V	2.0A	24.00W
ATS024T- ☐ 150	15.0V	1.6A	24.00W
ATS024T- ☐ 240	24.0V	1.0A	24.00W
ATS024T- ☐ 480	48.0V	0.5A	24.00W

Input

Voltage	100-240VAC
Line Frequency	50-60Hz
Current	0.58A Max.
Protection	Internal Primary Current Fuse
Configuration	IEC60320/C6,C8,C14

Derating Curve

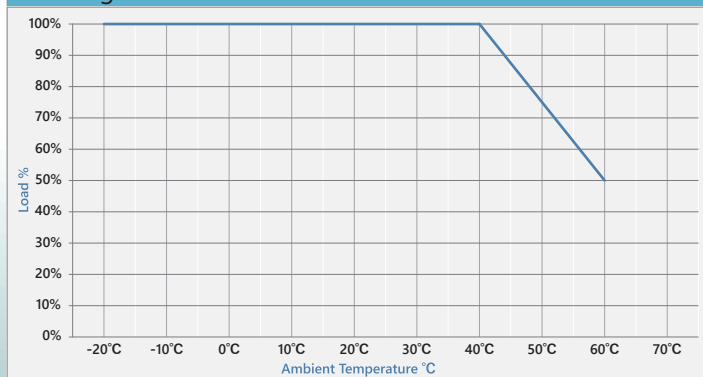

Output

Load Regulation	±5% (Typical)
Ripple & Noise	≤ 2% Vp-p @ Full Load
Transient (Dynamic) Response	0.5mS with 50% Load Change
Start-up Time	< 3,000mS
Hold-up Time	≥ 10mS @ Full Load
Rise Time	< 50mS
Protection	Short Circuit Protection / Over Voltage Protection / Over Current Protection

Electrical

Topology	Switching Flyback
Dielectric Withstand	3,000VAC Primary - Secondary
Leakage Current	< 0.25mA @ 2Pin / < 5mA @ 3Pin
Efficiency	DoE Level VI, ErP Stage 2, CoC Tier 2
EMC Standards	EN55032 EN61000-3-2,3 EN55035
MTBF	300,000 Calculated Hours at 25°C , by Telcordia SR-332

Environmental

Operating Temperature	-20 to + 40°C
Storage Temperature	-20 to + 80°C
Operating Altitude	2,000M
Relative Humidity	Operating : 20 to 80% RH Storage : 10 to 90% RH
Cooling	Natural Convection Cooling

Mechanical

Case Dimension	C6 & C14 : L100 x W50 x H33(mm) C8 : L88 x W50 x H34(mm)
Weight	166g (Ref.)