

SPU25B series

V1.4

The SPU25B series of AC/DC switching mode power supplies provide 25 Watts of continuous output power. All models meet FCC Part-15 class B and CISPR-22 class B emission Limits and are designed to comply with UL/c-UL marking conformity assessment. All units pass burn-in test at full load condition.



25W External Power Supply for General Purpose

FEATURES:

- * Wide Operating Voltage 90 to 264 VAC, 47 to 63 Hz
- * IEC-320-C8 Input Inlet
- * Optional Output Connector (See page appendix)
- * Single Output
- * Efficiency level V (SPU25B-105~111)
- * 3 year warranty

APPLICATIONS:

- * Ethernet Hub
- * Portable Devices
- * Charger
- * Monitor
- * Set-top Box
- * AV Equipment

GENERAL SPECIFICATION:

- * **Short Circuit Protection:** Auto Recovery
- * **Cooling:** Free Air Convection
- * **Protection Classes:** Double insulated, Class II
- * **Safety:** UL 60950-1:2nd Edition, IEC 60950-1:2005 /A2:2013, EN60950-1:2006 /A2:2013, CSA C22.2 NO.60950-1-07

APPROVALS:



Electrical Characteristics:

| Symbol | Characteristic | Condition | Min. | Typ. | Max. | Unit |
|--------|---------------------------------------|---|------------------|------|-------|-------|
| Vins | Safety Approval Input Voltage Range | Safety Approval & Specification in Label | 100 | | 240 | VAC |
| Vin | Input Operate Voltage Range | Detail to see Fig.1 | 90 | | 264 | VAC |
| Fi | Input Frequency | Sine wave | 47 | | 63 | Hz |
| Po | Output Power Range | See Rating Chart | | | 25 | W |
| Iil | Low Line Input Current | Full Load, Vin=100VAC | | 0.55 | | A |
| Iih | High Line Input Current | Full Load, Vin=240VAC | | 0.22 | | A |
| Irl | Low Line Input Inrush Current | Full Load, 25°C, Cool start, Vin=100VAC | | | 25 | A |
| Irh | High Line Input Inrush Current | Full Load, 25°C, Cool start, Vin=240VAC | | | 60 | A |
| Ik | Safety Ground Leakage Current | Vin=240VAC, Fi=60Hz | | | 0.25 | mA |
| η | Efficiency | Full Load, Vin=230VAC, Detail to see Rating Chart | See Rating Chart | | | |
| ΔVoi | Line Regulation | Full Load, Vin=100~120VAC | 0.5 | | 1 | % |
| ΔVoL | Load Regulation | Vin=230VAC, 10~90% Load Change at Condition | 1 | | 5 | % |
| OLP | Over Load Protection | Nil.But, Output protected to short circuit conditions | | | | |
| ttr | Time of Transient Response | Io=Full Load to Half Load, Vin=110VAC | | | 4 | ms |
| thu | Hold-Up Time | Full Load, Vin=100VAC | See Rating Chart | | | |
| ts | Start-up time | Full Load, Vin=100~240VAC | | | 2 | s |
| Tc | Temperature Coefficient | Full load, Vin=100~240VAC | | | ±0.04 | %/°C |
| HV | Dielectric Withstanding Voltage (P-S) | Primary to Secondary | | | 4242 | VDC |
| EMI | EMC Emission | Compliance to EN55022 (CISPR22) | | | B | Class |



Environmental:

| Symbol | Characteristic | Condition | Min. | Typ. | Max. | Unit |
|--------|--------------------------------|--|------|------|------|------|
| To | Operating Temperature | Detail to see Fig.2 (Derate linearly from 100% load at 40°C to 50% load at 70°C) | 0 | | 70 | °C |
| Ts | Storage Temperature | 10 ~ 95% RH | -40 | | 85 | °C |
| Ho | Operating Humidity | non-condensing | 0 | | 95% | RH |
| Hs | Storage Humidity | | 0 | | 95% | RH |
| ESDa | Electro Static Discharge | Air Discharge, IEC61000-4-2 | | | 8 | kV |
| ESDc | Electro Static Discharge | Contact Discharge, IEC61000-4-2 | | | 4 | kV |
| MTBF | Mean Time Between Failure | Operating Temperature at 25°C, Calculated per MIL-HDBK-217F | 300k | | | h |
| ELEV | Operating Altitude (Elevation) | All condition | | | 2000 | m |
| VBR | Vibration | 10 ~ 500Hz, 10min./1cycle, 60min. each along X, Y, Z axes | | | 5 | G |
| Vsl | Surge Voltage | Line-Neutral | | | 1 | kV |


SPECIFICATION NOTE :

1. Output can provide up to peak load when the power supply starts up. Continuous staying in more than rated load is not allowed.
2. At factory, in 60% rated load condition, each output is checked to be within voltage accuracy.
3. Line regulation is defined by changing $\pm 10\%$ of input voltage from nominal line at rated load.
4. Load regulation is defined by changing $\pm 40\%$ of measured output load from 60% rated load.
5. The ripple is measured from peak to peak with a bandwidth-limit of 20MHz (Measured at the output connector with a 0.1 μ F ceramic capacitor and a 47 μ F electrolytic capacitor).
6. Hold up time is measured from the end of the last charging pulse to the time which the main output drops down to low limit of main output at rated load and nominal line.
7. Efficiency is measured at rated load, and nominal line.

MECHANICAL DIMENSIONS: (UNIT: mm [inch])

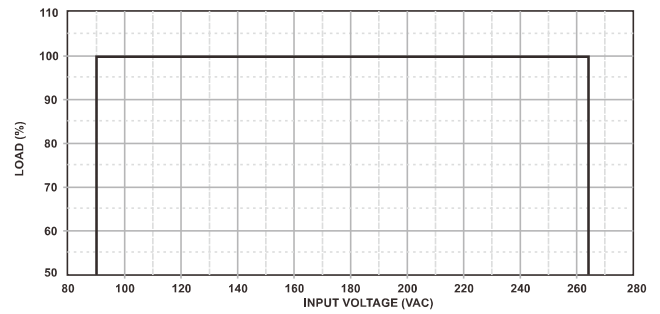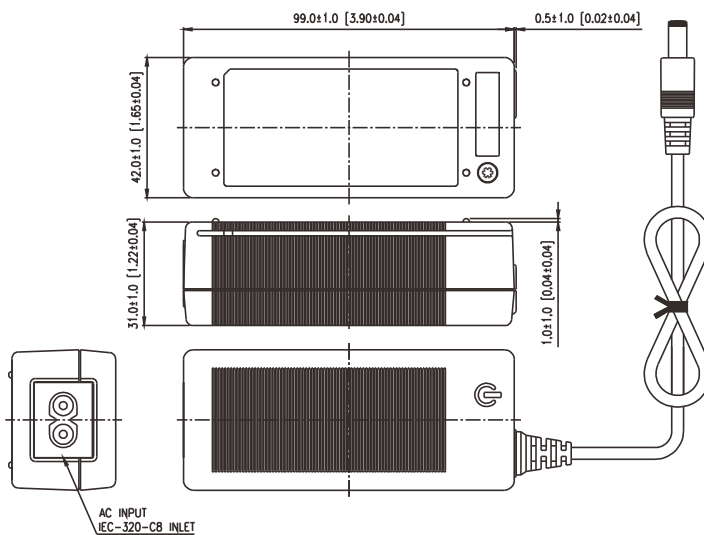

(FIG.1) INPUT VOLTAGE DERATING CURVE

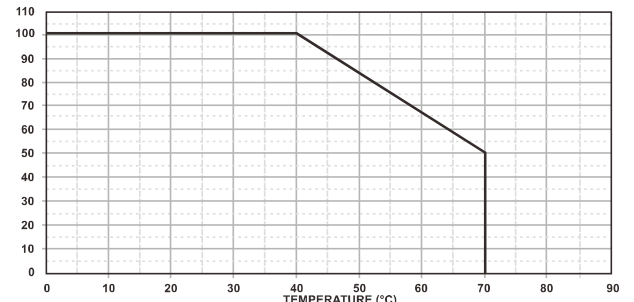

(FIG.2) TEMPERATURE DERATING CURVE

PACKING :

1. Net weight: 170g approx.
2. Optional output connectors available contact sales for details.

Rating Chart:

| MODEL NO. | Setting Voltage Range (Factory setting, can't be adjusted) | | Output Current (Based on the output volt.) | | Maximum Output Power (W) | Ripple & Noise (mVp-p) | Total Regulation (%) | Typ. Efficiency (%) | Typ. No Load Consumption (W) | Hold-Up Time (ms) | Protection Mode |
|-------------|---|-------|---|------|--------------------------------|---------------------------|-------------------------|------------------------|------------------------------------|----------------------|-----------------|
| | min | max | min | max | | | | | | | |
| | (VDC) | (VDC) | (A) | (A) | | | | | | | |
| *SPU25B-102 | 5.0 | 6.0 | 2.75 | 3.30 | 16.5 | 60 | ± 5 | 75.3 | 0.5 | 12 | Hiccup |
| *SPU25B-103 | 6.0 | 8.0 | 2.50 | 3.33 | 20 | 80 | ± 5 | 77 | 0.5 | 12 | Hiccup |
| SPU25B-104 | 8.0 | 11.0 | 2.00 | 2.75 | 22 | 110 | ± 5 | 77.9 | 0.5 | 12 | Hiccup |
| SPU25B-105 | 11.0 | 13.0 | 1.92 | 2.27 | 25 | 130 | ± 5 | 82.4 | 0.3 | 12 | Hiccup |
| *SPU25B-106 | 13.0 | 16.0 | 1.56 | 1.92 | 25 | 150 | ± 5 | 82.4 | 0.3 | 12 | Hiccup |
| *SPU25B-107 | 16.0 | 21.0 | 1.19 | 1.56 | 25 | 200 | ± 5 | 83 | 0.3 | 12 | Hiccup |
| SPU25B-108 | 21.0 | 27.0 | 0.92 | 1.19 | 25 | 200 | ± 4 | 83 | 0.3 | 12 | Hiccup |
| *SPU25B-109 | 27.0 | 33.0 | 0.75 | 0.92 | 25 | 250 | ± 3 | 83 | 0.3 | 12 | Hiccup |
| *SPU25B-110 | 33.0 | 40.0 | 0.62 | 0.75 | 25 | 250 | ± 3 | 83 | 0.3 | 12 | Hiccup |
| *SPU25B-111 | 40.0 | 48.0 | 0.52 | 0.62 | 25 | 300 | ± 3 | 83 | 0.3 | 12 | Hiccup |

[*] =MOQ is required. Please contact sales.
 SPU25B-102~104 are not in compliance with CEC V.
 SPU25B-105~111 are in compliance with CEC V.