

36 Watt Series

Wall Mount Type

USA / Japan / Taiwan / Europe / UK / Australia / China / AC Plug Changeable

ATS036T - W X X X ☐

O / P Voltage

U : US Plug
E : EU Plug
B : UK Plug
A : AU Plug
C : CN Plug
V : Changeable Plug



Features :


- IEC/EN/UL 62368-1 3rd Edition
- 100-240VAC Universal Input
- Regulated Output With Low Ripple Noise
- Safety Agency Requirements and EMI/EMS Certified
- Modified and Custom Design Available
- 1 Year Warranty

Model	O/P Voltage	O/P Current	Watt
ATS036T-W050 ☐	5.0V	5.00A	25W
ATS036T-W075 ☐	7.5V	4.00A	30W
ATS036T-W085 ☐	8.5V	3.52A	30W
ATS036T-W090 ☐	9.0V	3.34A	30W
ATS036T-W120 ☐	12.0V	3.00A	36W
ATS036T-W121 ☐	12.0V	2.50A	30W
ATS036T-W135 ☐	13.5V	2.66A	36W
ATS036T-W150 ☐	15.0V	2.40A	36W
ATS036T-W160 ☐	16.0V	2.25A	36W
ATS036T-W180 ☐	18.0V	2.00A	36W
ATS036T-W240 ☐	24.0V	1.50A	36W
ATS036T-W480 ☐	48.0V	0.75A	36W

Input

Voltage	100-240VAC	
Line Frequency	50-60Hz	
Current	1A Max.	
Protection	Internal Primary Current Fuse	
Configuration	U for US Plug	B for UK Plug
	E for EU Plug	A for AU Plug
	C for CN Plug	
	V for Changeable Plug	

Derating Curve

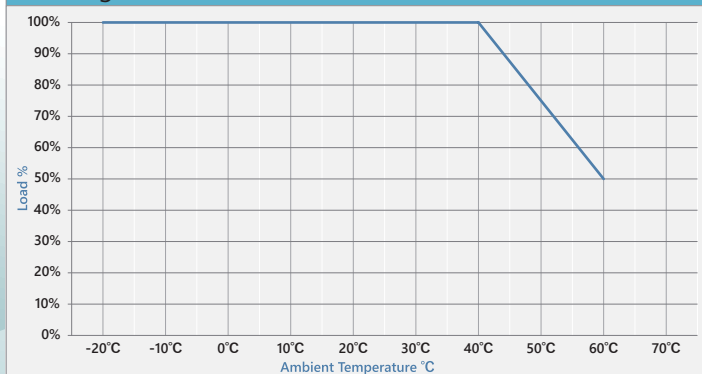

Output

Load Regulation	±5% (Typical)
Ripple & Noise	≤ 2% Vp-p @ Full Load
Transient (Dynamic) Response	0.5mS with 50% Load Change
Start-up Time	< 3,000mS
Hold-up Time	≥ 10mS @ Full Load
Rise Time	< 50mS
Protection	Short Circuit Protection / Over Voltage Protection / Over Current Protection

Electrical

Topology	Switching Flyback
Dielectric Withstand	3,000VAC Primary - Secondary
Leakage Current	< 0.25mA
Efficiency	DoE Level VI, ErP Stage 2, CoC Tier 2
EMC Standards	EN55032
	EN61000-3-2,3
	EN55035
MTBF	300,000 Calculated Hours at 25°C, by Telcordia SR-332

Environmental

Operating Temperature	-20 to + 40°C
Storage Temperature	-20 to + 80°C
Operating Altitude	2,000M
Relative Humidity	Operating : 20 to 80% RH
	Storage : 10 to 90% RH
Cooling	Natural Convection Cooling

Mechanical

Case Dimension	U - L 79 x W 34 x H 74 (mm)
	E - L 79 x W 34 x H 94 (mm)
	B - L 79 x W 49 x H 86 (mm)
	A - L 79 x W 41 x H 82 (mm)
	V - L 79 x W 35 x H 66 (mm)
Weight	160g (Ref.)

