

AD-A8 150Watts ES Series
DOE level VI and EU ErP Tier 2 Efficiency Compliant

AC/DC Switching Adapter - Single Output

FEATURES

- 60950-1,62368-1 approvals
- 3-prong IEC320-C14 AC inlet, Class I
- Output voltage range from +12V to +52V
- DOE level VI and EU ErP Tier 2 Efficiency Compliant
- No load Power consumption < 150mW
- 3 year warranty

ELECTRICAL SPECIFICATIONS

- Input range : 90 - 264VAC
- Frequency : 47 - 63Hz
- Power Factor : > 0.95 @115VAC; > 0.90 @230VAC @full load
- Inrush current : < 75A peak @115VAC; < 150A peak @230VAC cold start @25°C
- Input current (rms) : 2.5A @90VAC; 1.25A @264VAC max.
- Efficiency : > 89% @average load, 115/230VAC
- Maximum output power (Po) : 150Watts
- Hold-up time : > 16ms typical @full load, 115VAC
- Short Circuit Protection: Auto-recovery
- Over Load Protection: Auto-recovery
- Over Voltage Protection: Shutdown and latch off, AC recycle

ENVIRONMENTAL

- Operating temperature : 0 to +60°C (Derate linearly 2.5% per °C from 41 to 60°C)
- Storage temperature : -10°C to +85°C
- Humidity: 20% ~ 90%.
- MTBF : > 140,000 hours at full load and 25°C ambient temperature

DC OUTPUT & FEATURES

※ Other DC output 140W for 12-14V, 150W for 15-26V, 33-39V and 44-52V.

Model	Output Rating		Po	O/P Regulation	Ripple & Noise(Vp-p)	DOE Efficiency	EU ErP
PW-140A-1Y120H	12V	11.67A	140W	± 5%	240mV	VI	Tier 2
PW-150A-1Y160H	16V	9.38A	150W	± 5%	320mV	VI	Tier 2
PW-150A-1Y190H	19V	7.90A	150W	± 5%	380mV	VI	Tier 2
PW-150A-1Y240H	24V	6.25A	150W	± 3%	480mV	VI	Tier 2
PW-150A-1Y360H	36V	4.17A	150W	± 3%	480mV	VI	Tier 2
PW-150A-1Y480H	48V	3.13A	150W	± 3%	480mV	VI	Tier 2

Note: 1. Ripple and noise are measured at oscilloscope 20MHz bandwidth by a 10uF electrolytic capacitor and a 0.1uF ceramic capacitor in parallel at output connector.



RoHS Compliant

Dimension : L170 × W85 × H44 mm (6.69" × 3.35" × 1.73")
Weight : 0.78 kgs. (1.72 lbs.)

SAFETY STANDARDS


UL 60950-1
UL 62368-1
CSA C22.2-No.60950-1
CSA C22.2-No.62368-1
TUV EN60950-1
TUV EN62368-1
CB IEC 60950-1
CB IEC 62368-1

EMC STANDARDS

FCC Class B
CISPR22 Class B
EN 55032 Class B
CE

AC/DC Switching Adapter - Single Output

MECHANICAL SPECIFICATION

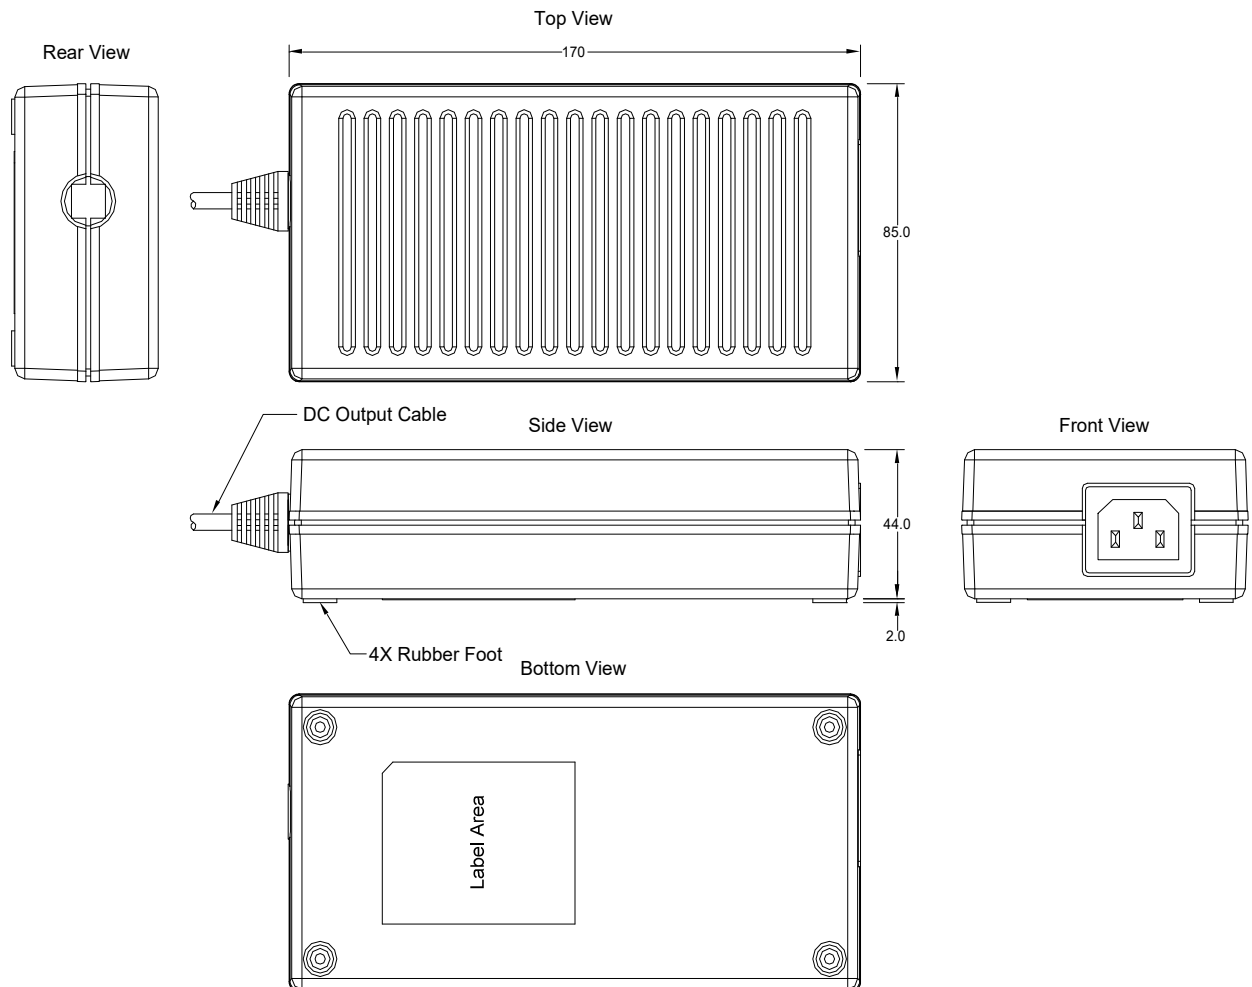

- Note:
1. AC Inlet : IEC320-C14
 2. Plastic Case Color : Black
 3. Tolerance : $\pm 0.5\text{mm}$
 4. Unit : mm

STANDARD OUTPUT CABLE

1. AWM 1571 # 14 AWG / 1C + SHIELDING, UL 80°C 30V VW-1, 1050 mm. (12-24V)
2. AWM 1185 # 16 AWG / 1C + SHIELDING, UL 80°C 300V VW-1, 1050 mm. (36-48V)
3. Depends on customers requirements.