

AC/DC Switching Adapter - Single Output

AD-A5 V4 250Watts Series US DOE & EU ErP Efficiency Compliant

FEATURES

- Meet DOE level VI and EU tier 1 Efficiency requirements
- 3-pole IEC320-C14 AC inlet
- Build-in 40x40x10mm DC fan with fan speed control
- Touch current : < 190uA @264VAC
- Altitude during operation: up to 3000m.
- No load Power consumption < 210mW
- 3 year warranty



ELECTRICAL SPECIFICATIONS

- Input range : 90 - 264VAC
- Frequency : 47 - 63Hz
- Power Factor : > 0.95 @115VAC; > 0.90 @230VAC @full load
- Inrush current : < 65A peak @115VAC; < 130A peak @230VAC cold start @25°C
- Input current (rms) : 3.5A @90VAC; 1.75A @264VAC max.
- Efficiency : > 88% @average load, 115/230VAC
- Maximum output power (Po) : 250Watts
- Hold-up time : > 16ms typical @full load, 115VAC
- Short Circuit Protection: Auto-recovery
- Over Load Protection: Auto-recovery
- Over Voltage Protection: Shutdown and latch off, AC recycle

RoHS Compliant

Dimension : L188.5 × W104.5 × H60 mm (7.42" × 4.1" × 2.36")
Weight : 1.05 kgs. (2.31 lbs.)

SAFETY STANDARDS

UL 60950-1
UL 62368-1
CSA C22.2-No.60950-1
CSA C22.2-No.62368-1
TUV EN60950-1
TUV EN62368-1
CB IEC 60950-1
CB IEC 62368-1

EMC STANDARDS

FCC Class B
CISPR22 Class B
EN 55032 Class B
CE

ENVIRONMENTAL

- Operating temperature : -20 to +60°C (Derate linearly 2.5% per °C from 41 to 60°C)
(Derate linearly 1.0% per °C from -1 to -20°C)
- Storage temperature : -20°C to +85°C
- Humidity: 10% ~ 90%.
- MTBF : > 140,000 hours at full load and 25°C ambient temperature

DC OUTPUT & FEATURES

Model	Output Rating		Po	O/P Regulation	Ripple & Noise(Vp-p)	Efficiency Level
PW-250A4-1Y120E	12V	20.83A	250W	±5%	240mV	VI
PW-250A4-1Y160E	16V	15.63A	250W	±5%	300mV	VI
PW-250A4-1Y190E	19V	13.16A	250W	±5%	300mV	VI
PW-250A4-1Y200E	20V	12.5A	250W	±5%	300mV	VI
PW-250A4-1Y240E	24V	10.42A	250W	±5%	300mV	VI
PW-250A4-1Y360E	36V	6.94A	250W	±5%	300mV	VI
PW-250A4-1Y480E	48V	5.21A	250W	±5%	300mV	VI

- Note:**
1. Ripple and noise are measured at oscilloscope 20MHz bandwidth by a 10uF electrolytic capacitor and a 0.1uF ceramic capacitor in parallel at output connector.
 2. -20 to -10°C output characteristics Output regulation are ±6% for 36V




トキトレーディング株式会社 電話079-560-7333

AD-A5 V4 250Watts Series
US DOE & EU ErP Efficiency Compliant

AC/DC Switching Adapter - Single Output

MECHANICAL SPECIFICATION

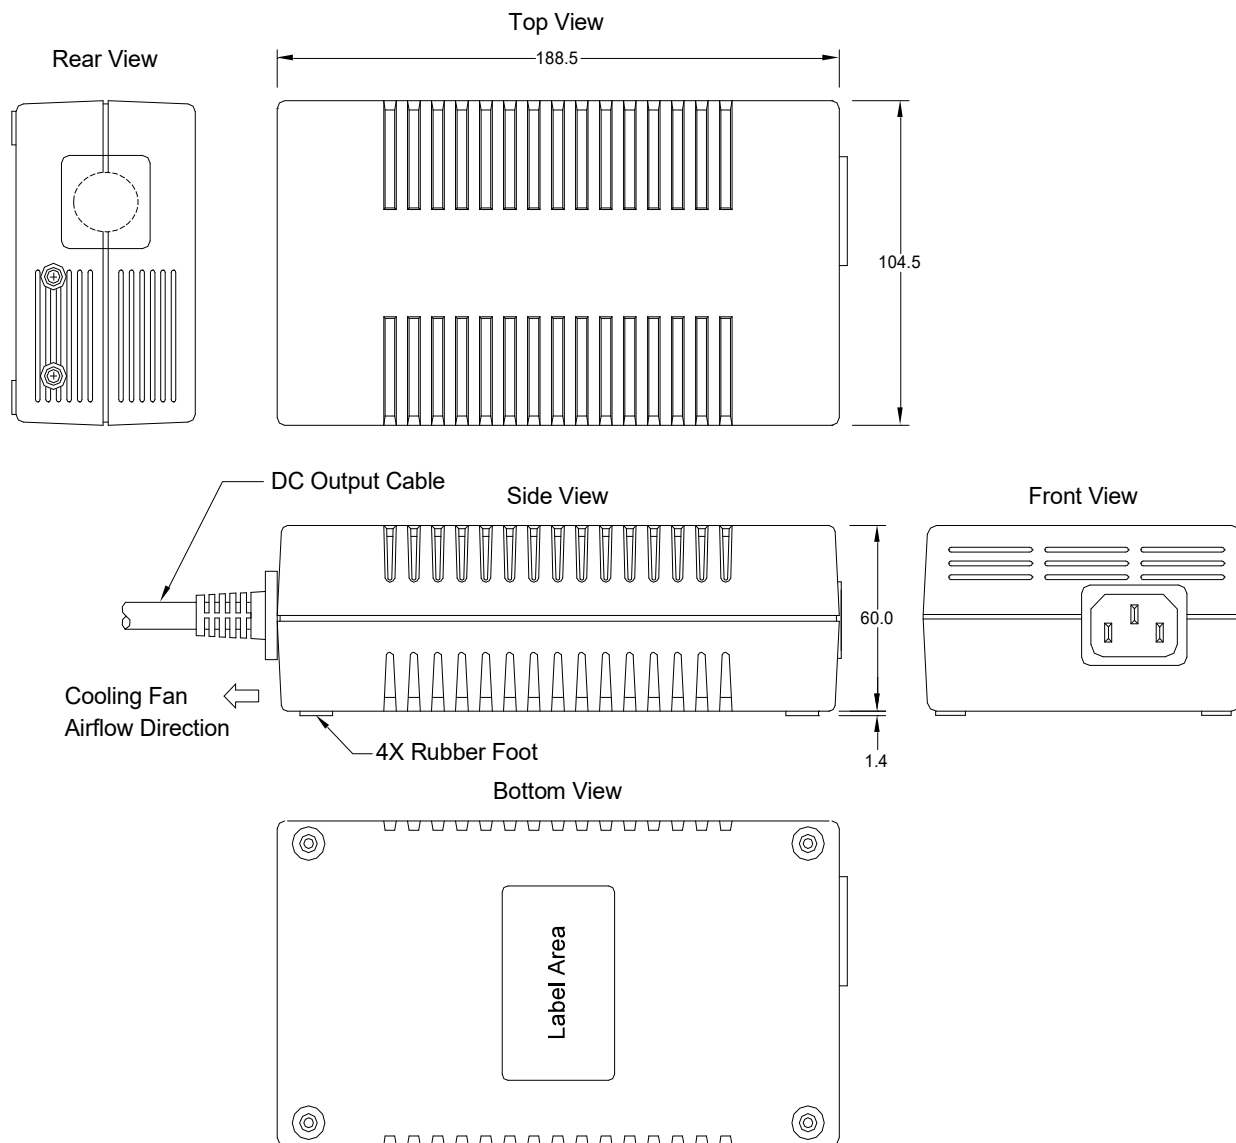

- Note:
1. AC Inlet : IEC320-C14
 2. Plastic Case Color : Black
 3. Tolerance : $\pm 0.5\text{mm}$
 4. Unit : mm



トキトレーディング株式会社 電話079-560-7333

REV. 3.4

AC/DC Switching Adapter - Single Output

MECHANICAL SPECIFICATION

Derating Curve

