

AC/DC Switching Adapter - Single Output

ITE/Medical AC/DC Power Adapter AD-A12 Series 250Watts

DOE level VI & EU Erp tier 2 Efficiency

FEATURES

- ITE 60950-1, 62368-1 & Medical 60601-1 approvals. (Class I)
- 3-prong IEC320-C14, Class I (I/O Switch Option)
- Medical safety approved (2x MOPP between primary to secondary)
Suitable for BF application with appropriate system consideration.
- Altitude during operation: ITE/Medical up to 5000m.
- $\leq 0.15W$ No Load Input Power
- Touch current less than 100uA
- Meet IEC60601-1-2 Ed4:2014
- 3 year warranty

ELECTRICAL SPECIFICATIONS

- Input range : 90 - 264VAC
- Frequency : 47 - 63Hz
- Power Factor : > 0.95 @115VAC; > 0.90 @230VAC @full load
- Inrush current : $< 40A$ peak @115VAC; $< 80A$ peak @230VAC cold start @25°C
- Input current (rms) : 2.5A @115VAC; 1.3A @230VAC max.
- Efficiency : $> 89\%$ (Average) 25 %, 50 %, 75 % and 100 % of full load @ 115/230VAC
- Touch current $< 100uA$ @264VAC
- Maximum output power (Po) : 250 Watts convection cooling
- Hold-up time : $> 10ms$ typical @full load, 115VAC
- Short circuit protection : Auto-recovery
- Over load protection : 105% to 160% maximum power, Auto-recovery
- Over voltage protection : Auto-recovery

ENVIRONMENTAL

- Operating temperature : -20 to +60°C (Refer to "Derating Curve")
- Cooling: Convection-cooling
- Storage temperature: -20°C to +85°C
- Humidity: Non-condensing 0% to 95%
- MTBF : $> 200,000$ hours @full load and 25°C ambient temperature based on Belcore TR-332



RoHS compliant

Dimension : L 200×W 90×H45 mm (7.874"x3.543"x1.77")

Weight : 1.3 kgs. (2.87 lbs.)

SAFETY STANDARDS

UL/cUL 60601-1 3.1st Edition
TUV EN60601-1 3.1st Edition
CB IEC60601-1 3.1st Edition
UL/cUL UL60950-1
UL/c-UL UL62368-1
TUV EN60950-1
TUV EN62368-1
CB IEC 60950-1
CB IEC 62368-1

EMC STANDARDS

EN60601-1-2 Ed4:2015
IEC60601-1-2 Ed4:2014
EN 55011 Class B
EN55032 Class B
EN55024 Class B
FCC Part 15 Class B
FCC Part 18 Class B
CE

DC OUTPUT & FEATURES

Model No.	Output Rating		Po	Output Regulation	Ripple & Noise (Vp-p)	DOE Efficiency	EU ErP
PW-250A-1Y120P1MZ	+12V	20.83A	250W	±5%	240mV	VI	Tier 2
PW-250A-1Y190P1MZ	+19V	13.157A	250W	±5%	300mV	VI	Tier 2
PW-250A-1Y240P1MZ	+24V	10.416A	250W	±5%	300mV	VI	Tier 2
PW-250A-1Y280P1MZ	+28V	8.928A	250W	±5%	300mV	VI	Tier 2
PW-250A-1Y360P1MZ	+36V	6.94A	250W	±5%	300mV	VI	Tier 2
PW-250A-1Y480P1MZ	+48V	5.208A	250W	±5%	300mV	VI	Tier 2
PW-250A-1Y540P1MZ	+54V	4.629A	250W	±5%	300mV	VI	Tier 2

Note:

1. Ripple and noise are measured at oscilloscope 20MHz bandwidth by a 47uF electrolytic capacitor and a 0.1uF ceramic capacitor in parallel at output connector.
2. AC INLET : IEC 320-C14(3PIN)
3. Z = S to denote With I/O Switch, Z = X to denote Without I/O Switch.




ITE/Medical AC/DC Power Adapter
AD-A12 Series 250Watts
 DOE level VI & EU Erp tier 2 Efficiency

AC/DC Switching Adapter - Single Output

MECHANICAL SPECIFICATION

Model No. : PW-250A-1YXXXP1MS
 With "S" With I/O Switch

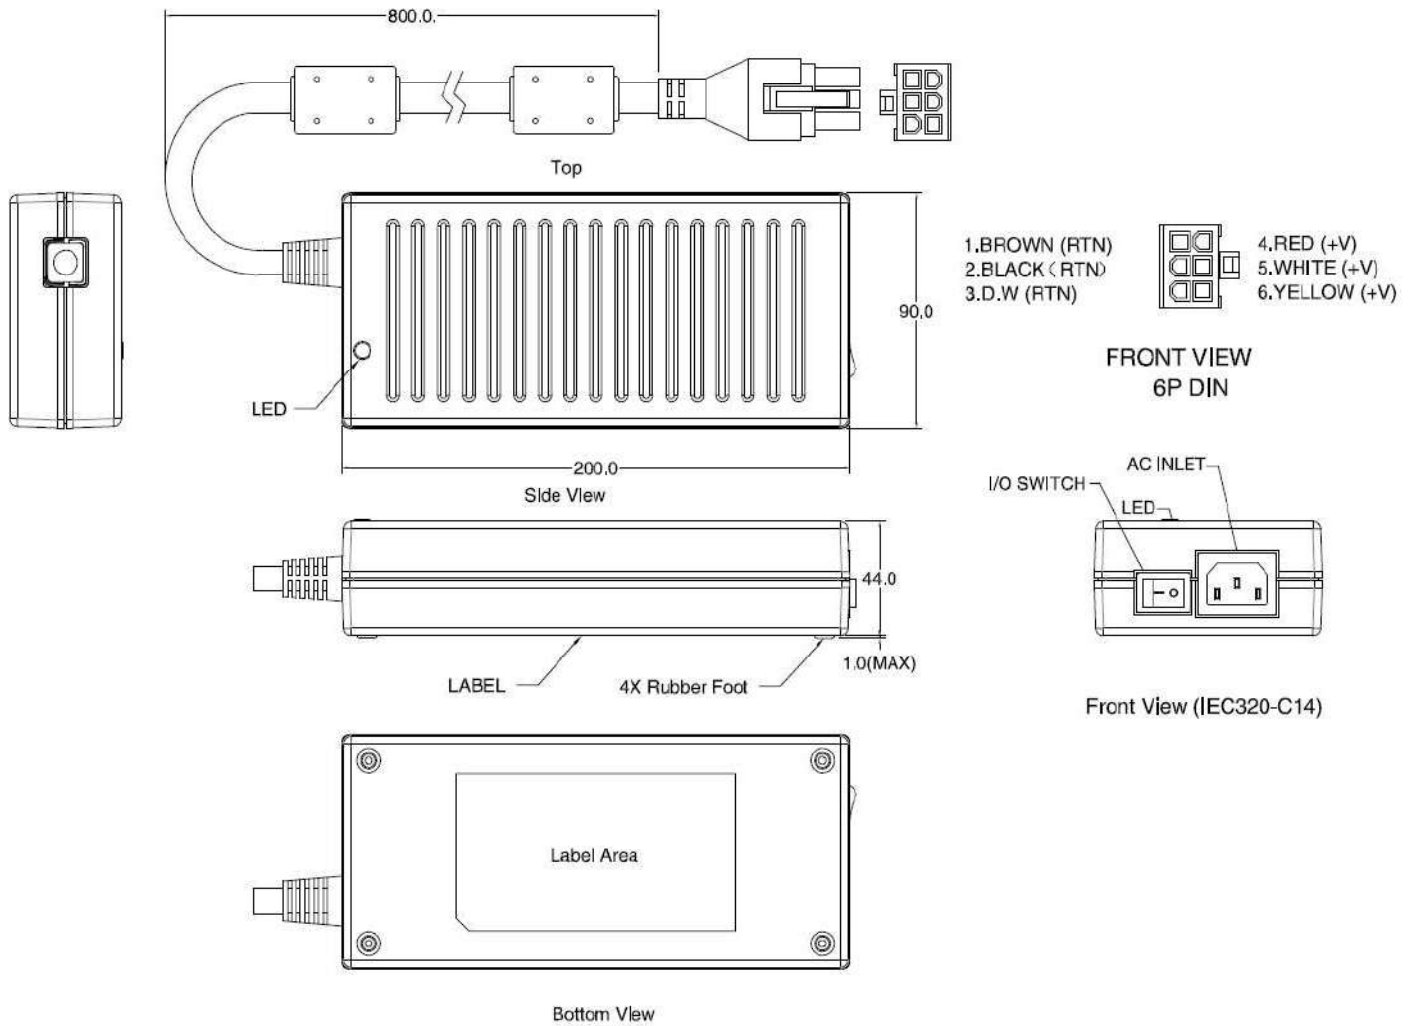

Dimension : L200(7.874") x W90(3.543") x H45(1.77")mm
 NOTE : TOLERANCE: +/-1mm(0.04")(LxWxH)


AC/DC Switching Adapter - Single Output

ITE/Medical AC/DC Power Adapter AD-A12 Series 250Watts

DOE level VI & EU Erp tier 2 Efficiency

MECHANICAL SPECIFICATION

Model No. : PW-250A-1YXXXP1MX
With "X" Without I/O Switch

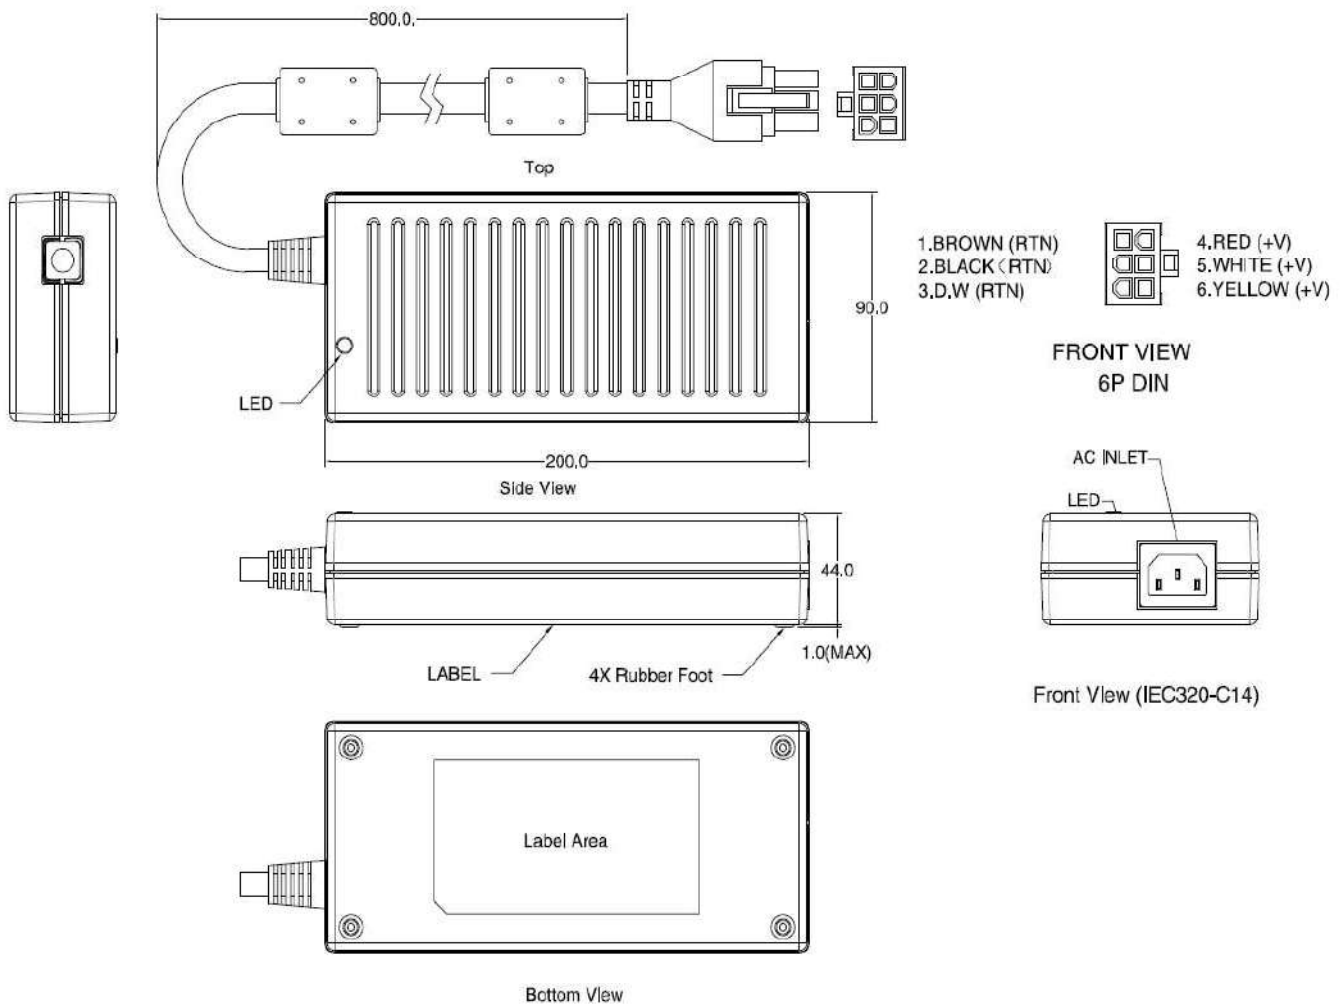

Dimension : L200(7.874") x W90(3.543") x H45(1.77")mm

NOTE : TOLERANCE: ± 1 mm (0.04") (LxWxH)

