

**NEW**

**I.T.E.**

**Medical**



# 600 Watt Series

Desktop Type

**ATM600A4 - P X X X**

P : C14 ← → O / P Voltage



### Features :


- IEC/EN/ANSI/AAMI ES60601-1 (Edition 3.2)
- EMC : IEC60601-1-2 (Edition 4.1)
- 100-240 VAC Universal Input
- Efficiency up to 96%
- Regulated Output with Low Ripple Noise
- Modified and Custom Design Available
- 2 Years Warranty

Model	O/P Voltage	O/P Current	Watt
ATM600A4-P120	12.0V	45.00A	540W
ATM600A4-P240	24.0V	25.00A	600W
ATM600A4-P480	48.0V	12.50A	600W
ATM600A4-P560	56.0V	10.71A	600W

### Input

Voltage	100-240VAC
Line Frequency	50-60Hz
Current	7.0A-2.7A
Protection	Internal Primary Current Fuse
Configuration	IEC60320/C14

### Derating Curve

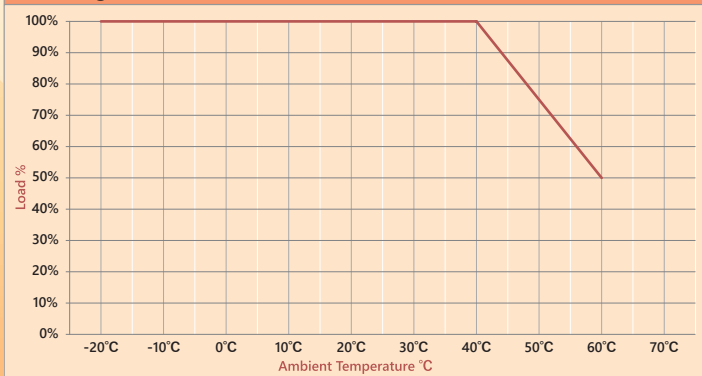

### Output

Load Regulation	±5% ( Typical )
Ripple & Noise	≤ 1% Vp-p @ Full Load
Transient (Dynamic) Response	0.5mS with 50% Load Change
Start-up Time	< 3,500mS
Hold-up Time	≥ 10mS @ Full Load
Rise Time	< 50mS
Protection	Short Circuit Protection / Over Voltage Protection / Over Current Protection / Over Temperature Protection

### Electrical

Topology	LLC
Dielectric Withstand	4,000VAC Primary - Secondary
Touch Current (Patient) Leakage Current	< 100µA
Earth Leakage Current	< 5mA
EMC Standards	EN55032 / EN55011
	EN61000-3-2,3
	EN55035 / EN61000-4-2,3,4,5,6,8,11
MTBF	300,000 Calculated Hours at 25°C , by Telcordia SR-332

### Environmental

Operating Temperature	-20 to + 40°C
Storage Temperature	-20 to + 80°C
Operating Altitude	5,000M
Relative Humidity	Operating : 20 to 80% RH
	Storage : 10 to 90% RH
Cooling	Natural Convection Cooling

### Mechanical

Case Dimension	L 254 × W 119 × H 50.5 (mm)
Weight	2,100g (Ref.)