

GENERAL DESCRIPTION:

The series provides a voltage range from 12 V to 48 V, delivering up to 90 watts of power, suitable for various applications and devices.

HPA90C

C6 Type AC Inlet

**HPA90A**

C14 Type AC Inlet

Dimensions (L × W × H): 142 × 60 × 32mm

**FEATURES:**

- Input Voltage Range: 70–264 VAC
- Output Voltage: 12V / 15V / 18V / 19V / 24V / 48V
- Operating Temperature: -40 to +70°C
- Surge Immunity: line to line ±1kV, line to ground ±2kV
- Suitable for BF Application
- Operating Altitude: 5000 m (Medical) / 7000 m (I.T.E.)
- Meets DoE VII and ErP VII
- Protection: OVP, OLP, OTP, SCP
- Extremely Low Leakage Current < 0.1 mA
- Built-In EMI Filter
- High Surge Immunity
- Designed to Meet ISN & 60335
- LED Indicator
- 3-Year Warranty

**OPTIONAL FEATURES:**

- OVC III
- IP54
- Withstand 305 VAC Surge Input for 1 Minute

*IP54 optional. Not recommended for use in environments with continuous high humidity or moisture.

APPLICATIONS:

- Medical Devices
- Telecommunication Devices
- Household Devices
- Consumer Electronics
- Office Electronics
- Industrial Equipment

GENERAL SPECIFICATION:

- **Ingress Protection:** IP22
- **Protection Classes:** Class I
- **Safety:**
IEC 62368-1 Edition 2.0, IEC 62368-1 Edition 3.0, EN 62368-1, UL62368-1, CAN/CSA-C22.2 NO.62368-1-14, IEC 60601-1 Edition 3.2, EN60601-1, ANSI/AAMI ES60601-1: 2005 (R2012), CSA C22.2 NO. 60601-1:1

ELECTRICAL CHARACTERISTICS:

Characteristic	Condition	Min.	Typ.	Max.	Unit
Nominal Input Voltage	100–240 VAC	100		240	VAC
Input Voltage Range	Derate Linearly from 100% load at 90 VAC to 70% load at 70 VAC	70		264	VAC
Input Frequency Range	Sine Wave	47		63	Hz
Power Factor Correction		0.93	0.97		
Output Power	See Rating Chart			90	W
Low Line Input Current	Full Load, Vin=115 VAC			0.9	A
High Line Input Current	Full Load, Vin=230 VAC			0.45	A
Low Line Input Inrush Current	Full Load, 25°C, Cool Start, Vin=115 VAC			50	A
High Line Input Inrush Current	Full Load, 25°C, Cool Start, Vin=230 VAC			100	A
Earth Leakage Current	0.1 mA @264 VAC Normal Condition, 0.3mA @264 VAC Single Fault Condition			0.1	mA
Average Efficiency	CoC v5 (Tier2), See Rating Chart	89	93		%
Line Regulation				0.5	%
Load Regulation	Vin=100–240 VAC		2.5	4.5	%
Hold-Up Time	Hold up time is measured from the end of the last charging pulse to the time which the main output drops down to low limit of main output at rated load and nominal line.	20			ms
Start-Up Time	Full Load: 100–240 VAC. The product is designed to start optimally when powered within 100–240 VAC.			1	s
Rise Time	At 115 VAC & 230 VAC			50	ms
Isolation	Input to Output		4000		VAC
	Input to PE		1500		VAC
	Output to PE (Option)		1500		VAC



PROTECTION:

Characteristic	Condition	Min.	Typ.	Max.	Unit
Short Circuit	Hiccup Mode, (Non-Latching, Auto-Recovery)				
Over Temperature	Latch Mode, (Non-Latching, Auto-Recovery)				
Overvoltage	Latch Mode	110		150	%
Overload / Overcurrent	Hiccup Mode, (Non-Latching, Auto-Recovery)	110		180	%

ENVIRONMENTAL:


Characteristic	Condition	Min.	Typ.	Max.	Unit
Operating Temperature	Derate Linearly From 100% Load at 40°C to 50% Load at 70°C	-40		70	°C
Storage Temperature	Surrounding Air Temperature	-40		85	°C
Temperature Coefficient	All Condition			±0.04	%/°C
Operating Humidity	10–95% RH (Non-Condensing)	10		95%	RH
Storage Humidity		0		95%	RH
Operating Altitude	Up to 5000 m (Medical) / 7000 m (I.T.E.)	5000		7000	m
Vibration	Non-Operating, 5–500 Hz, 2.09 Grms, 20 minute for Each Three Axis			2.09	G

STATIC CHARACTERISTICS & POWER DE-RATING CURVE:

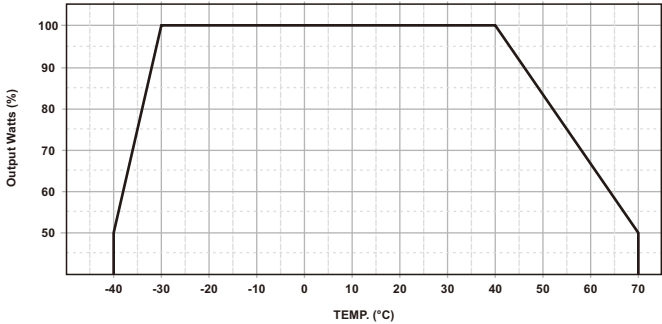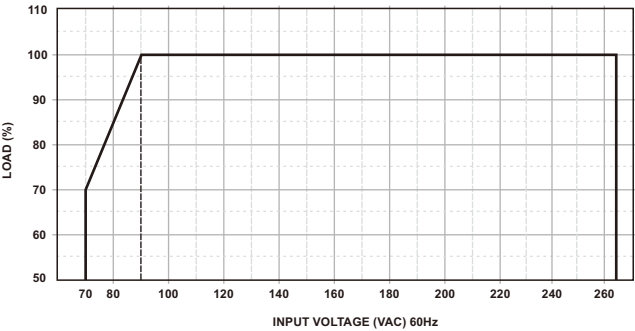


EFFICIENCY VERSUS OUTPUT LOAD :


■ HPA90A-120

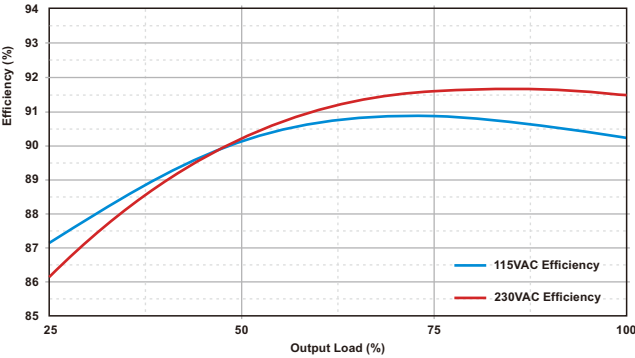

■ HPA90A-240

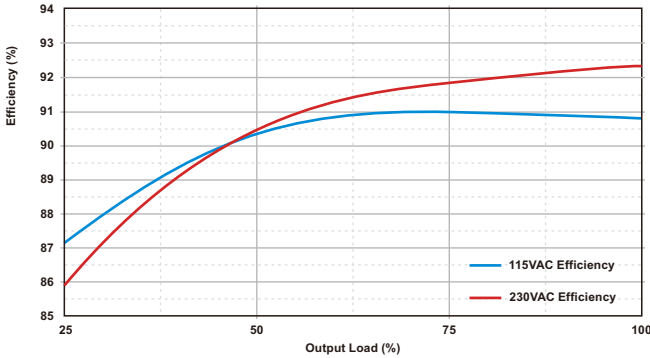

■ HPA90A-480

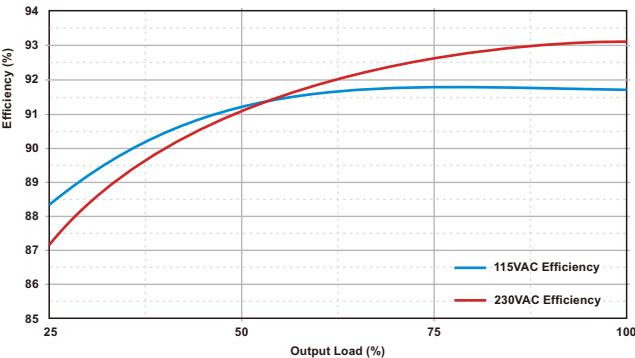


RATING CHART:

MODEL NO.	Rated Output Voltage	Rated Output Current	Maximum Output Power	Ripple & Noise	Total Regulation	Efficiency @115VAC	Efficiency @230VAC	AVG. Efficiency	10% Load Efficiency	Max.No Load Consumption
	(VDC)	(A)	(W)	(mVp-p)	(%)	(%)	(%)	(%)	(%)	(W)
HPA90□-120	12.0	7.50	90	100	±4.5	90.3	91.6	89.0	83.0	0.15
HPA90□-150	15.0	6.00	90	120	±4.5	91.0	92.3	89.0	83.0	0.15
HPA90□-180	18.0	5.00	90	150	±4.5	90.4	91.4	89.0	83.0	0.15
HPA90□-190	19.0	4.73	90	150	±4.5	90.7	91.5	89.0	83.0	0.15
HPA90□-240	24.0	3.75	90	150	±3.0	89.8	91.1	89.0	83.0	0.15
HPA90□-480	48.0	1.87	90	150	±2.5	91.5	92.8	89.0	83.0	0.15


* 0-20% Load ripples2% Vo

PRODUCT CODING:

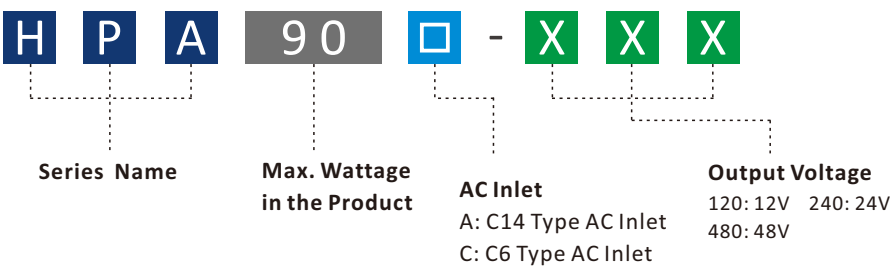


MECHANICAL DIMENSIONS: (UNIT: mm)

HPA90A

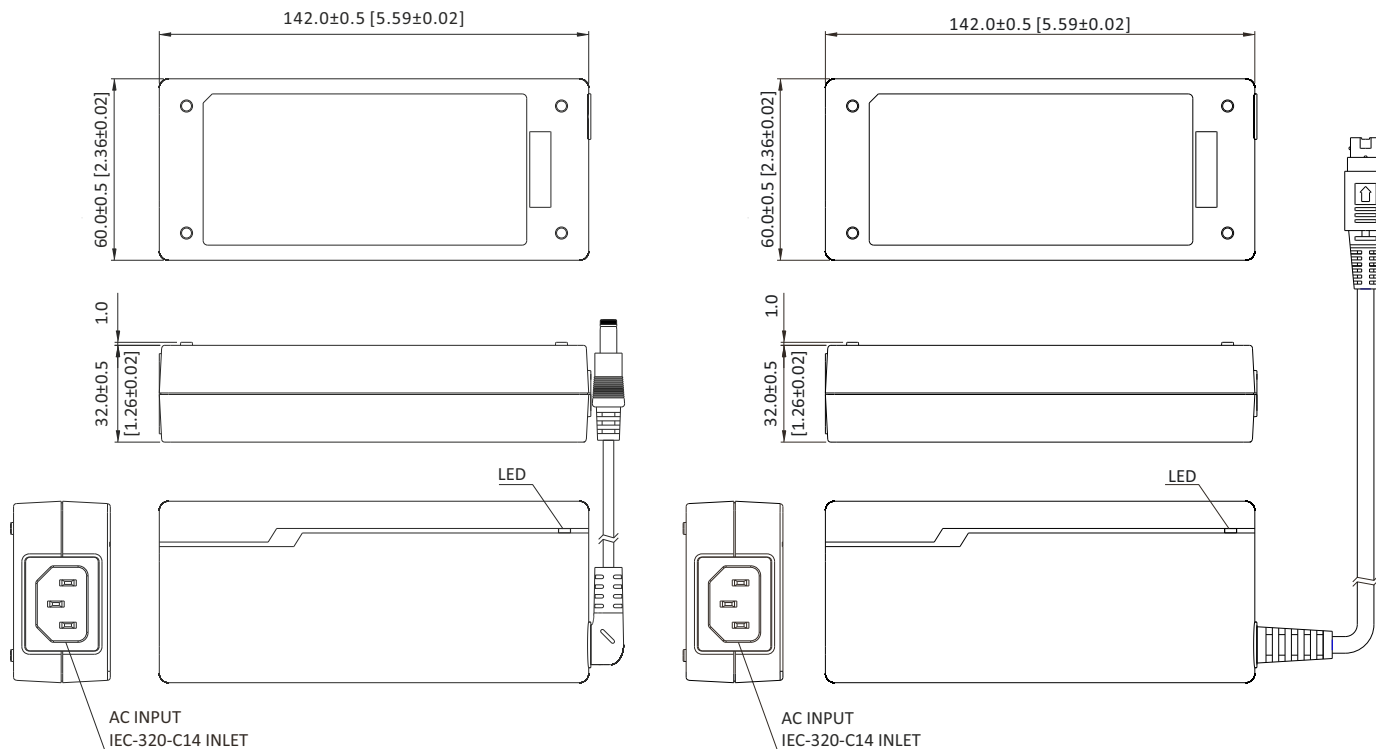

HPA90C

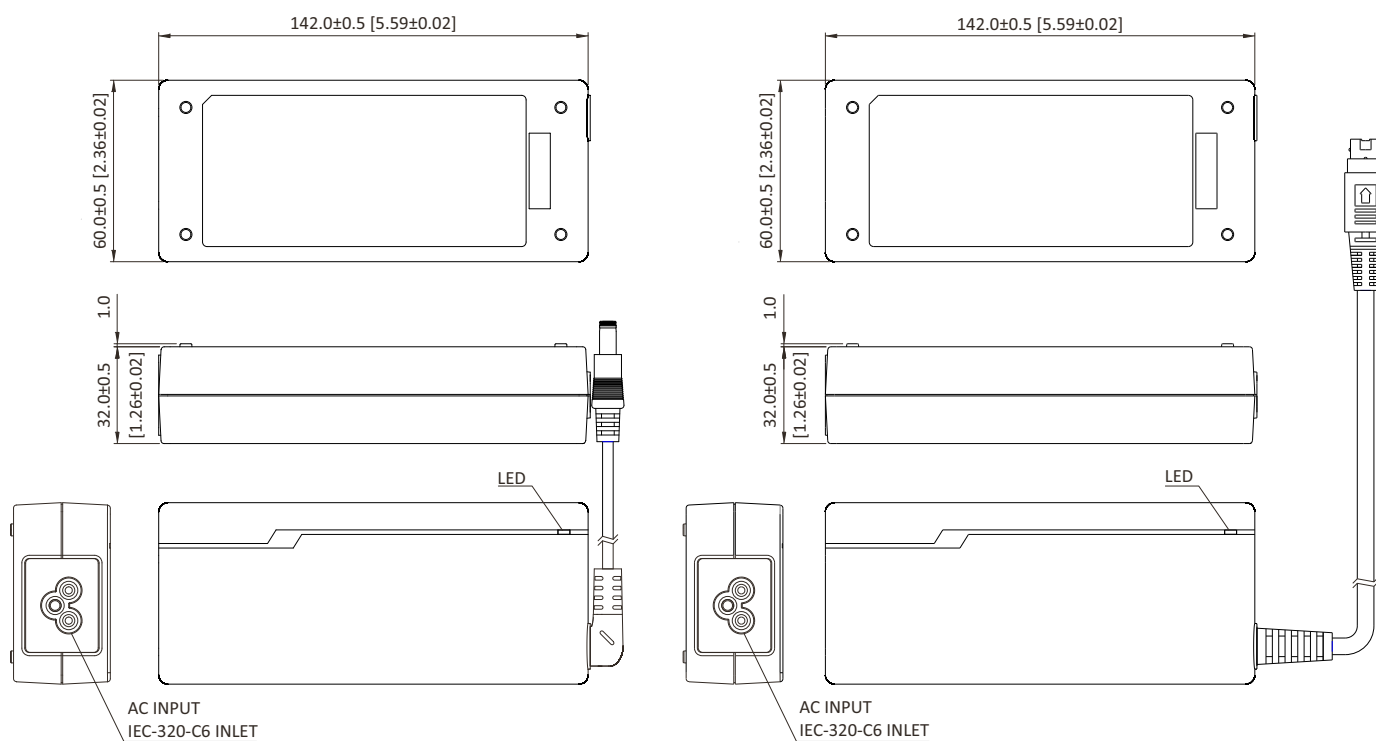

EMC EMISSION:

MEDICAL / ITE	Parameter	Standard	Test Level
MEDICAL	Conducted	EN55011	Meet Class B limit
	Radiated	EN55011	Meet Class B limit
	Harmonics	EN61000-3-2	PASS
	Flicker	EN61000-3-3	PASS
ITE	Conducted	EN55032	CLASS B
	Radiated	EN55032	CLASS B
	Harmonics	EN61000-3-2	N/A
	Flicker	EN61000-3-3	PASS

* The EMC test requires the integration of the switching power supply with the load of an end system.
Consequently, variations in the application or assembly of the end system will influence the test results.

EMC IMMUNITY:

MEDICAL / ITE	Parameter	Standard	Test Level	Criteria
MEDICAL	ESD	EN61000-4-2	15 kV air discharge, 8 kV discharge coupling plane	A
	RS	EN61000-4-3	-	A
	EFT	EN61000-4-4	2 kV	A
	Surge	EN61000-4-5	line to line ±1 kV, line to ground ±2 kV	A
	CS	EN61000-4-6	0.15-80 (MHz)	A
	PFMF	EN61000-4-8	-	A
	Voltage Dips (230V & 100V)	EN61000-4-11	0% UT, 0.5 cycle (10ms) @ Full Load 0°/45°/90°/135°/180°/225°/270°/315°/360°	A
			0% UT, 1 cycle (20 ms), 0° @ Full Load	B
			70% UT, 25 cycle (500ms), 0° @ Full Load	A
	Voltage Interruptions (230V & 100V)	EN61000-4-11	0% Ut, 250 cycle (5s) @ Full Load 0°/45°/90°/135°/180°/225°/270°/315°/360°	B
ITE	ESD	EN61000-4-2	8kV air discharge, 4kV contact discharge	A
	RS	EN61000-4-3	80-1000(MHZ) 1800, 2600, 3500, 5000 (MHZ) (±1%)	A
	EFT	EN61000-4-4	2 kV	A
	Surge	EN61000-4-5	line to line ±1 kV, line to ground ±2 kV	A
	CS	EN61000-4-6	0.15-80(MHz)	A
	PFMF	EN61000-4-8	-	A
	Voltage Dips (230V & 100V)	EN61000-4-11	0% UT, 0.5 cycle (10ms) @ Full Load 0°/45°/90°/135°/180°/225°/270°/315°/360°	A
			0% UT, 1 cycle (20ms), 0° @ Full Load	B
			70% UT, 25 cycle (500ms), 0° @ Full Load	A
	Voltage Interruptions (230V & 100V)	EN61000-4-11	0% UT, 250 cycle (5s) @ Full Load 0°/45°/90°/135°/180°/225°/270°/315°/360°	B

* The EMC test requires the integration of the switching power supply with the load of an end system.
Consequently, variations in the application or assembly of the end system will influence the test results.




OTHERS:

MEDICAL / ITE	Condition	Min.	Typ.	Max.	Unit
MTBF(typ.)	1 Million Hours Based on Telcordia SR-332(at 115 VAC, Max. load and 25°C Ambient)		1000 k		h
Net Weight	HPA90A-120 with a 16 AWG, 4ft Standard Cable		500		g





OUTPUT CABLE RECOMMENDATION :

1. Selected output connectors and wire, please refer to the Appendix.
2. 12 V–15 V are required to use 16 AWG, 4ft, UL2464, 80°C output cable.
3. 18 V–24 V are required to use 18 AWG, 4ft, UL2464, 80°C output cable.
4. 48 V are required to use 20 AWG, 4ft, UL11353, 80°C output cable.

STANDARD CONNECTOR:

POWER DIN-4 + Lock	Plug PN	Standard Connection				Wire Material	Wire Type
	P09B	P1,P2=OUT P3,P4=RTN SHIELD=GND				UL2464	12–15 V: 16 AWG / 4ft
							18–24 V: 18 AWG / 4ft
DIN-5 Male Plug	Plug PN	Standard Connection				Wire Material	Wire Type
	P05B	P1,P2,P4=RTN P3,P5=OUT SHIELD=GND				UL2464	12–15 V: 16 AWG / 4ft
						UL11353	48 V: 20AWG / 4ft
Barrel Female Plug	Plug PN	OD	ID	L	Standard Connection	Wire Material	Wire Type
	P01N	5.5	2.5	11	Center=OUT(+) Sleeve=RTN(-) (Tuning Fork Type)	UL11353	15 V: 14 AWG / 4ft
							18–19 V: 16 AWG / 4ft
							24 V: 18 AWG / 4ft
							48 V: 20 AWG / 4ft

OPTINONAL CONNECTOR:

Barrel Female Plug	Plug PN	OD	ID	L	Standard Connection	Wire Material	Wire Type
	P01M	5.5	2.5	9.5	Center=OUT(+) Sleeve=RTN(-) (Tuning Fork Type)	UL11353	15 V: 14 AWG / 4ft
	P01S	5.5	2.5	12			18–19 V: 16 AWG / 4ft
	P01S	5.5	2.5	12			24 V: 18 AWG / 4ft
	P01S	5.5	2.5	12			48 V: 20 AWG / 4ft
Barrel Angle Female Plug	Plug PN	OD	ID	L	Standard Connection	Wire Material	Wire Type
	P02M	5.5	2.5	9.5	Center=OUT(+) Sleeve=RTN(-) (Tuning Fork Type)	UL11353	15 V: 14 AWG / 4ft
	P02N	5.5	2.5	11			18–19 V: 16 AWG / 4ft
	P02N	5.5	2.5	11			24 V: 18 AWG / 4ft
	P02N	5.5	2.5	11			48 V: 20 AWG / 4ft

* Please contact our sales team for detailed information regarding optional output connectors.